

6

5

4

3

2


1

D

C


B

A

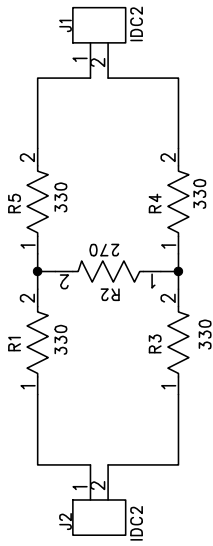

10 Db Attenuation

All Values in Ohms

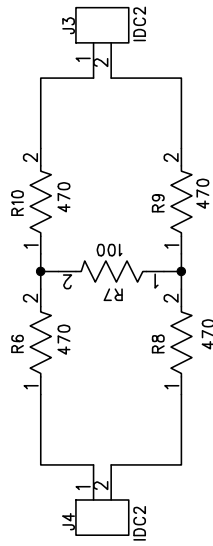

20 Db Attenuation

Note: A signal attenuated 20 Db  
will be 1/100 of it original value.

10 Db = 1/10

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:

COMPANY:			
TITLE: "H" pad balanced line Attenuator			
CODE:	SIZE: A	DRAWING NO:	REV:
SCALE:	SHEET: 1 OF 1		

DRAWN: KFH	DATED: 7/07
CHECKED:	DATED:
QUALITY CONTROL:	DATED:
RELEASED:	DATED: